

2/3/4 Megapixel H.265 Remote Focus&Zoom Pro Dome Network Camera





MS-C2972-F(I)PB/MS-C3772-F(I)PB/MS-C4472-F(I)PB



KEY FEATURES

- 0.002Lux Starlight
- Super WDR up to 140dB
- H.265 High Efficiency Video Coding
- Integrated Motorized Varifocal Lens(Auto Focus)
- Built-in ICR Filter for Day/Night switching
- Built-in web server for IE/Firefox/Chrome/Safari preview
- 3D-DNR, Privacy Masking and Motion Detection
- Weather-proof IP66 and Vandal-proof IK10-rated Metal Housing
- Micro SD/SDHC/SDXC card local storage support
- Built-in efficient IR LEDs, IR distance up to 30m
- Built-in 802.3af Compliant PoE
- Built-in Microphone
- Support ONVIF Profile S

DIMENSIONS (mm)

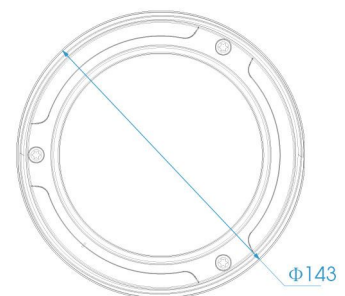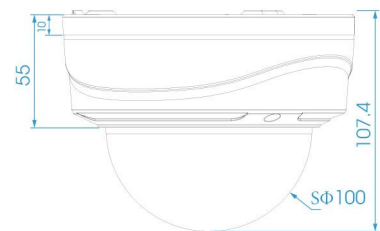

SUPPORTED BROWSERS



Firefox

IE

Chrome

Safari



	Model	MS-C2972-F(I)PB (2.0MP)	MS-C3772-F(I)PB (3.0MP)	MS-C4472-F(I)PB (4.0MP)
Camera	Image Sensor	1/2.8" Progressive Scan CMOS		1/3" Progressive Scan CMOS
	Min. Illumination	Color: 0.002Lux @F1.2 B/W: 0Lux with IR on	Color: 0.005Lux @F1.2 B/W: 0Lux with IR on	Color: 0.008Lux @F1.2 B/W: 0Lux with IR on
	WDR	Super WDR up to 140dB	Super WDR up to 120dB	
	Lens	Motorized 3.0~10.5mm/7~22mm @F1.4 P-Iris(Optional)		
	Mount	Φ14		
	Field of View	H90°~H31°(3.0~10.5mm)	H80°~H29°(3.0~10.5mm)	H76.2°~H25°(3.0~10.5mm)
	Shutter Time	1/100000s~1/5s		
	IR Distance	Up to 30m		
	Day&Night	ICR Filter Auto Switch		
	Video	Max Image Resolution	1920×1080	2048×1536
Frame Rate		30fps(1920×1080), 30fps(1280×960), 30fps(1280×720), 30fps(704×576)	30fps(2048×1536), 30fps(1920×1080), 30fps(1280×960), 30fps(1280×720), 30fps(704×576)	20fps(2592×1520), 30fps(2304×1296), 30fps(1920×1080), 30fps(1280×960), 30fps(1280×720), 30fps(704×576)
Video Compression		H.265(HEVC)/H.264/MJPEG		
Video Bit Rate		16Kbps~16Mbps(CBR/VBR Adjustable)		
Image Setting		Brightness/Contrast/Saturation/Sharpness		
Network		Ethernet	1*RJ45 10M/100M Ethernet Port	
	Network Storage	NAS(Support NFS, SMB/CIFS)		
	Protocol	TCP/IP, UDP, RTP, RTSP, RTCP, HTTP, HTTPS, DNS, DDNS, DHCP, FTP, NTP, SMTP, SNMP, UPnP, SIP, IPv6, PPPoE, VLAN		
Audio	Audio Streaming	Built-in Microphone		
	Audio Compression	G.711/AAC		
	Audio I/O	1/1 (Optional)		
System	Alarm I/O	1/1 (Optional)		
	Storage	Support Micro SD/SDHC/SDXC Local Storage, up to 64G		
	Advanced Function	Motion Detection, Privacy Masking, Backlight Compensation, 3D-DNR, ROI		
	SIP/VoIP Support	Yes, Voice & Video-over-IP		
	Event Trigger	Motion Detection, Network Disconnection, etc.		
	Event Action	FTP Upload/ SMTP Upload/ SD Card Record/ SIP Phone		
	System Compatibility	ONVIF Profile S		
General	Working Temperature	-30℃~60℃		
	Working Humidity	0~90%(Non-condensing)		
	Power Supply	PoE/ DC12V±10%(Optional)		
	Power Consumption	5.5W MAX	5W MAX	4W MAX
		7.5W MAX (With IR on)	7.5W MAX (With IR on)	6.5W MAX (With IR on)
	Weather Proof	Up to IP66 Rating for Weather-resistant Performance		
	Housing	Vandal-proof IK10-rated Metal Housing		
	Weight	1100g		
	Dimensions	Φ143mmX107.4mm		
	Warranty	2 Years		

Note: MS-C2972-F(I)PB, F refers to Motorized Lens, I refers to P-Iris, P refers to PoE, B refers to H.265

V6.10

