

Product Specification

EWS-3226-H


Date: 2017/3/3

Chipset	Atheros AR9341 600MHz			
DRAM	DDR 64MByte			
FLASH	8MByte			
IC	SiGe2576L			
Port	10/100Mbps LAN*2			
Speed	11b: 11M, 5.5M, 2M, 1Mbps			
	11g: 54M, 48M, 36M, 24M, 18M, 12M, 9M, 6Mbps			
	11N:6.5M, 13M, 13.5M, 19.5M, 26M, 27M, 39M, 40.5M, 52M, 54M, 58.5M, 65M, 81M, 108M, 121.5M, 135M, 150M, 270M, 300Mbps			
Transmission	DSSS			
Modulation	OFDM/BPSK/QPSK/CCK/DQPSK/DBPSK			
Transmission Speed	300Mbps			
Transmission Range	4~5 KM			
Frequency	2.4Ghz			
Standard	IEEE802.11n,IEEE802.11g,IEEE802.11b,IEEE802.3u,			
Protocol	CSMA/CA,TCP/IP,IPX/SPX,NetBEUI,DHCP,NDIS3,NDIS4,NDIS5			
Channel	2312~2732MHz			
Power Dissipation	≤5W			
Power	POE 24V 1A			
RF @25°C±2dB	802.11b	27±2dBm		
	802.11g	6-24Mbps	26±2dBm	
		36-48Mbps	25±2dBm	
		54Mbps	24±2dBm	
	802.11n	HT20	MCS 7	22±2dBm
		HT40	MCS 7	22±2dBm
Sensitivity	IEEE 802.11b	11Mbps ≤ -85dBm		
	IEEE 802.11g	54Mbps ≤ -70dBm		
	802.11n	HT20	MCS 7 ≤ -65dBm	
		HT40	MCS 7 ≤ -62dBm	
Antenna	Frequency	2300~2800MHz		
	Direction	Vertical / horizontal		
	Gain	16DBi		
Management	WEP Management	Yes		
	SNMP MIB	Yes		
	Telnet	Yes		
	Serial	Yes		
Security	MAC Address Control	No		
	Encryption	WEP 64/128bits,WPA,WPA2,802.1x		
Working Condition	Working Temperature	-30~65°C		
	Storage Temperature	-50~80°C		
	Humidity (non-condensed)	≤95%		

Product Size & Weight:

205 * 205 * 132.3MM

0.5kg

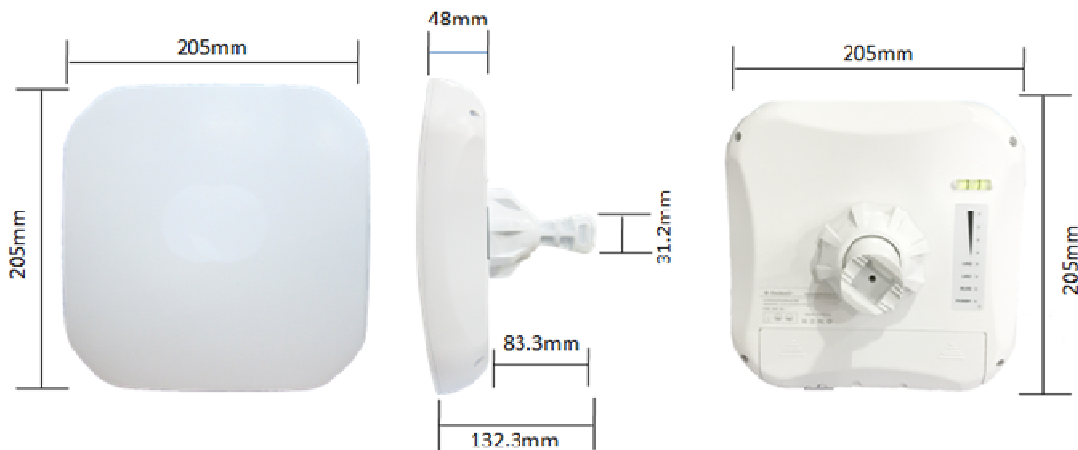

Package List

- 1 * AP
- 1 * 24V POE adaptor
- 1 * ring
- 1 * bracket kit
- 4 * screw
- 4 * rubber stick



Package Size & Weight

235 * 225 * 114MM

1.0kg

Carton Size & Weight

595 * 470 * 255MM

11.5kg

QTY: 10PCS



Label

Label Size: 50 * 33MM

Label Material: silver sticker

